

DOME TWEETER LOUDSPEAKER GDWK 9/80



9 5155 012

TECHNICAL DATA

| | | | |
|--|-----------------|-----|----------|
| Rated impedance | 4 | 8 | Ω |
| Voice coil resistance | 2,9 | 6,3 | Ω |
| Rated frequency range | 4 to 20 | | kHz |
| Resonance frequency | - | | kHz |
| Recommended crossover frequency | 4,8 | | kHz |
| Power handling capacity, P1/P2, measured with filter, | 80/2,5 160/5 | | W |
| Max. power | 89 | 88 | W |
| Sensitivity | 1,16 | | dB |
| Flux density | 104,6 | | T |
| Energy in air gap | 25/3/0,815 | | mJ |
| Air - gap | 3 | 1,9 | mm |
| Voice coil height | | | mm |
| Magnet | | | |
| - material | ferrite | | |
| - dimensions | 70/32/10 | | mm |
| - mass | 0,15 | | kg |
| Mass of loudspeaker | 0,5 | | kg |

AVAILABLE VERSIONS

- GDWK 9/80 - 4 Ω , catalogue number 9 5155 012 01
- GDWK 9/80 - 8 Ω , catalogue number 9 5155 012 05

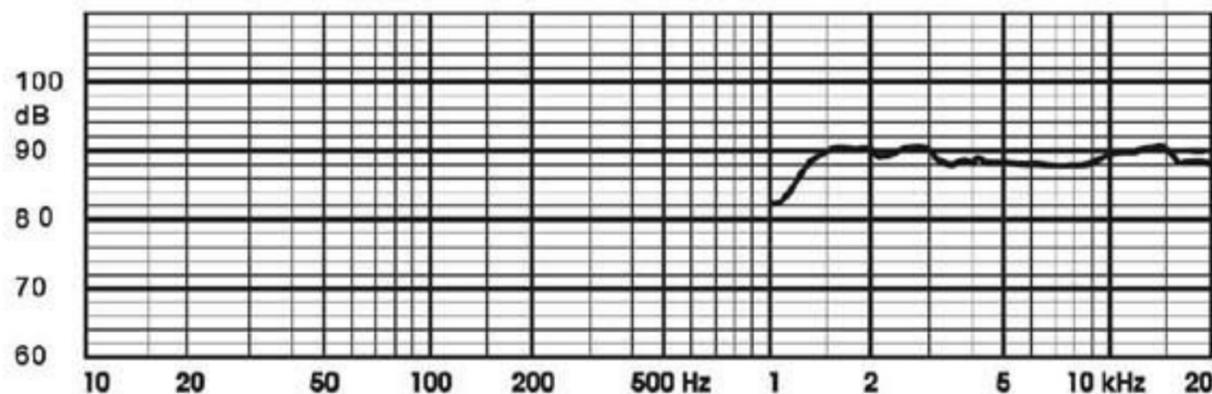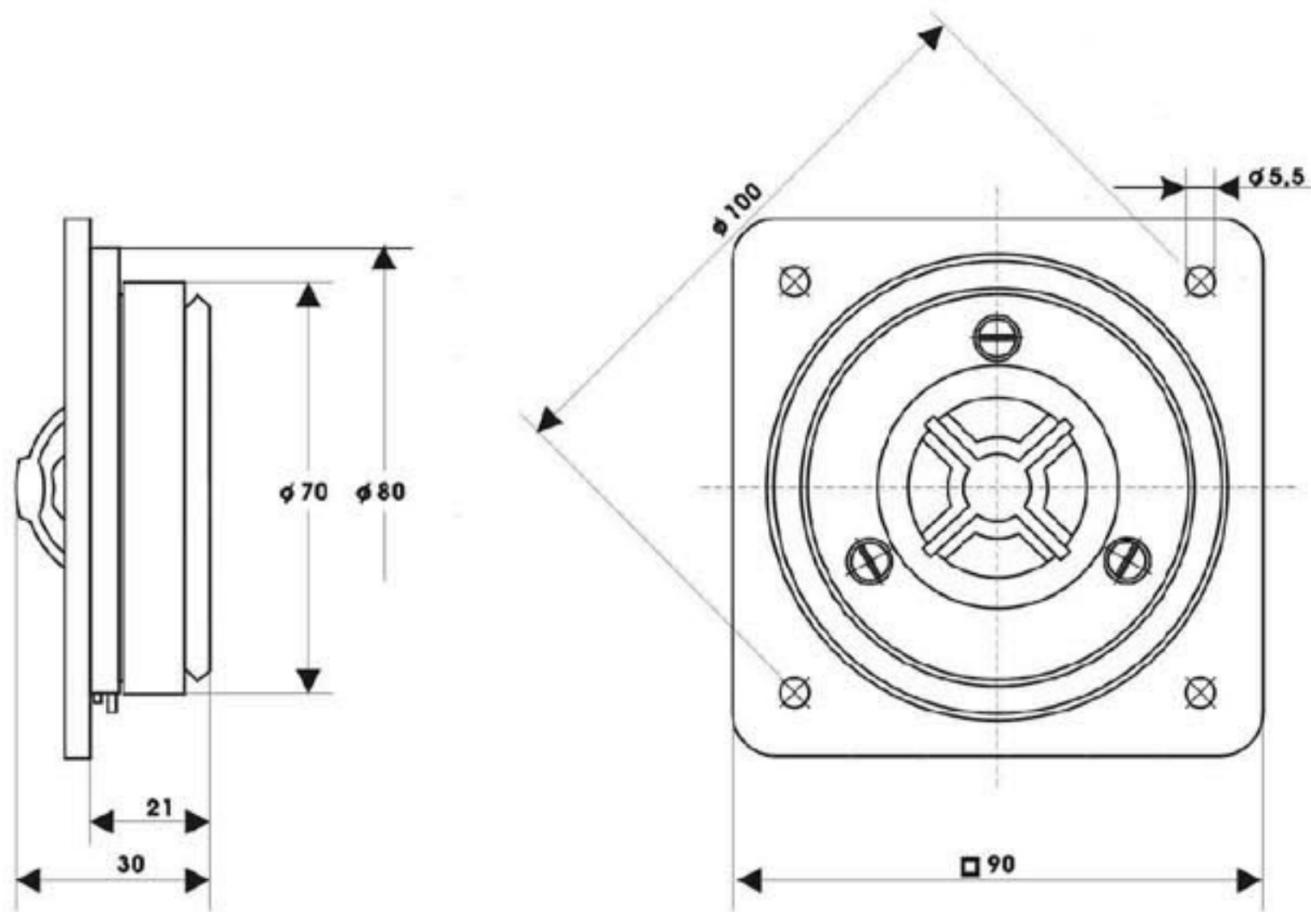

FREQUENCY RESPONSE CURVE
Measured in anechoic room at 1W, 1 m. Loudspeaker mounted
on IEC baffle.